

SCHEMATIC AND PARTS LIST

SENCORE TF26



SENCORE


3200 SENCORE DRIVE, SIOUX FALLS, SOUTH DAKOTA 57107




SENCORE

3200 SENCORE DRIVE, SIOUX FALLS, SOUTH DAKOTA 57107

BOARD LEGENDS

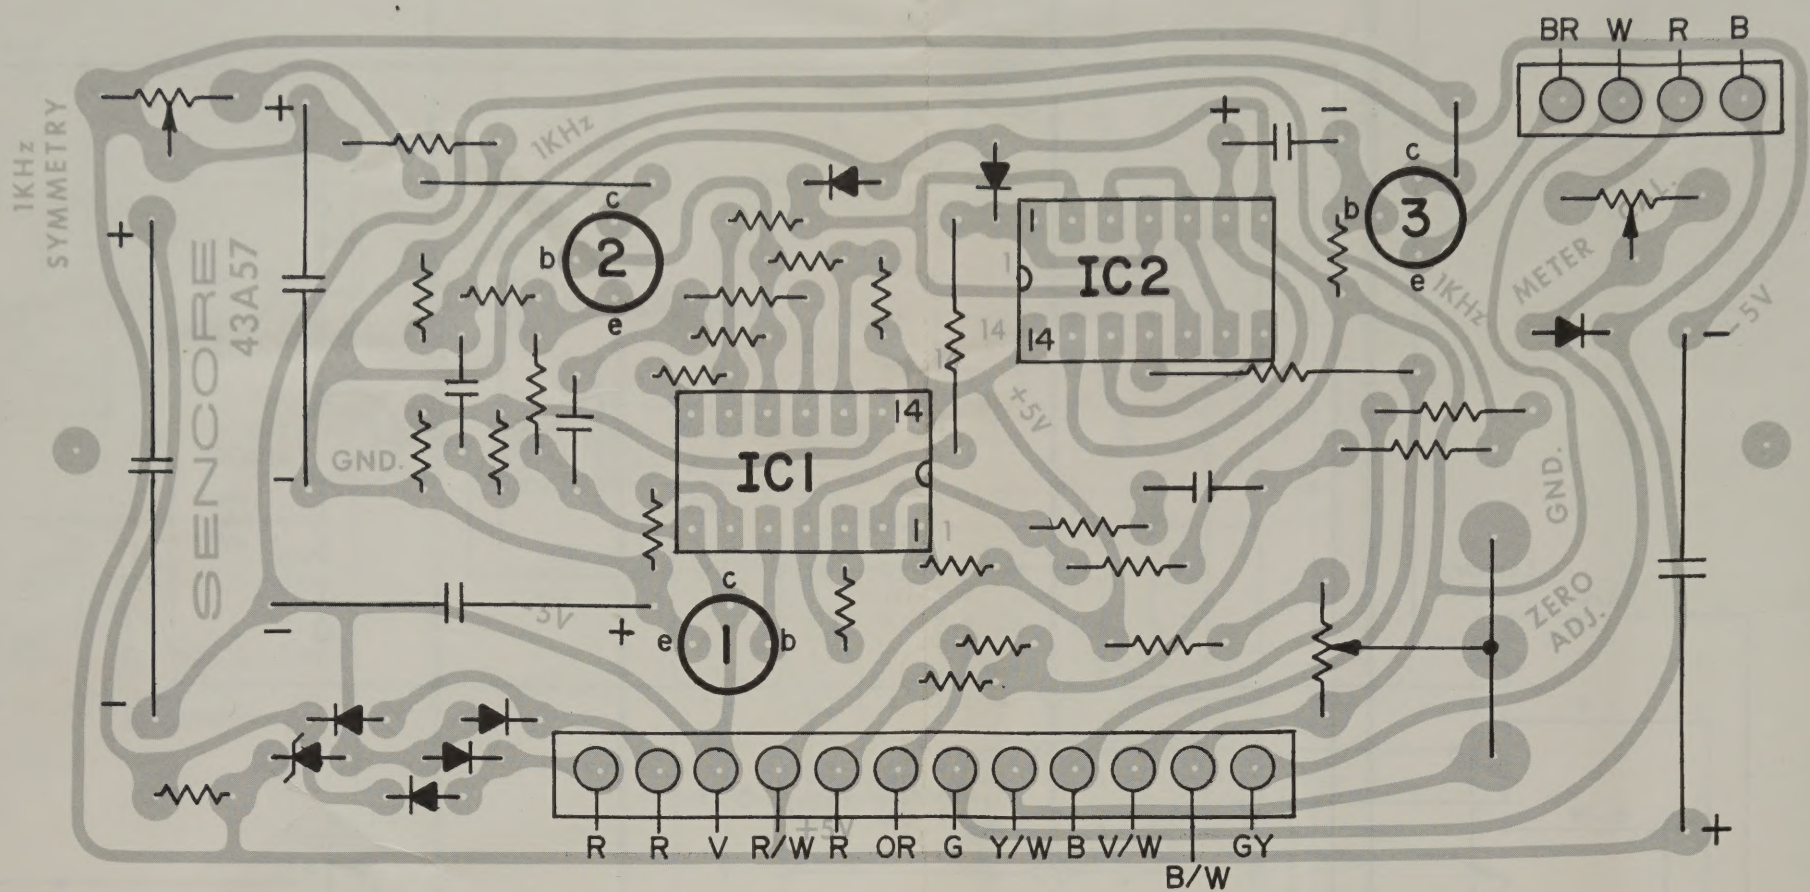


Main PC Board - Foil Side View

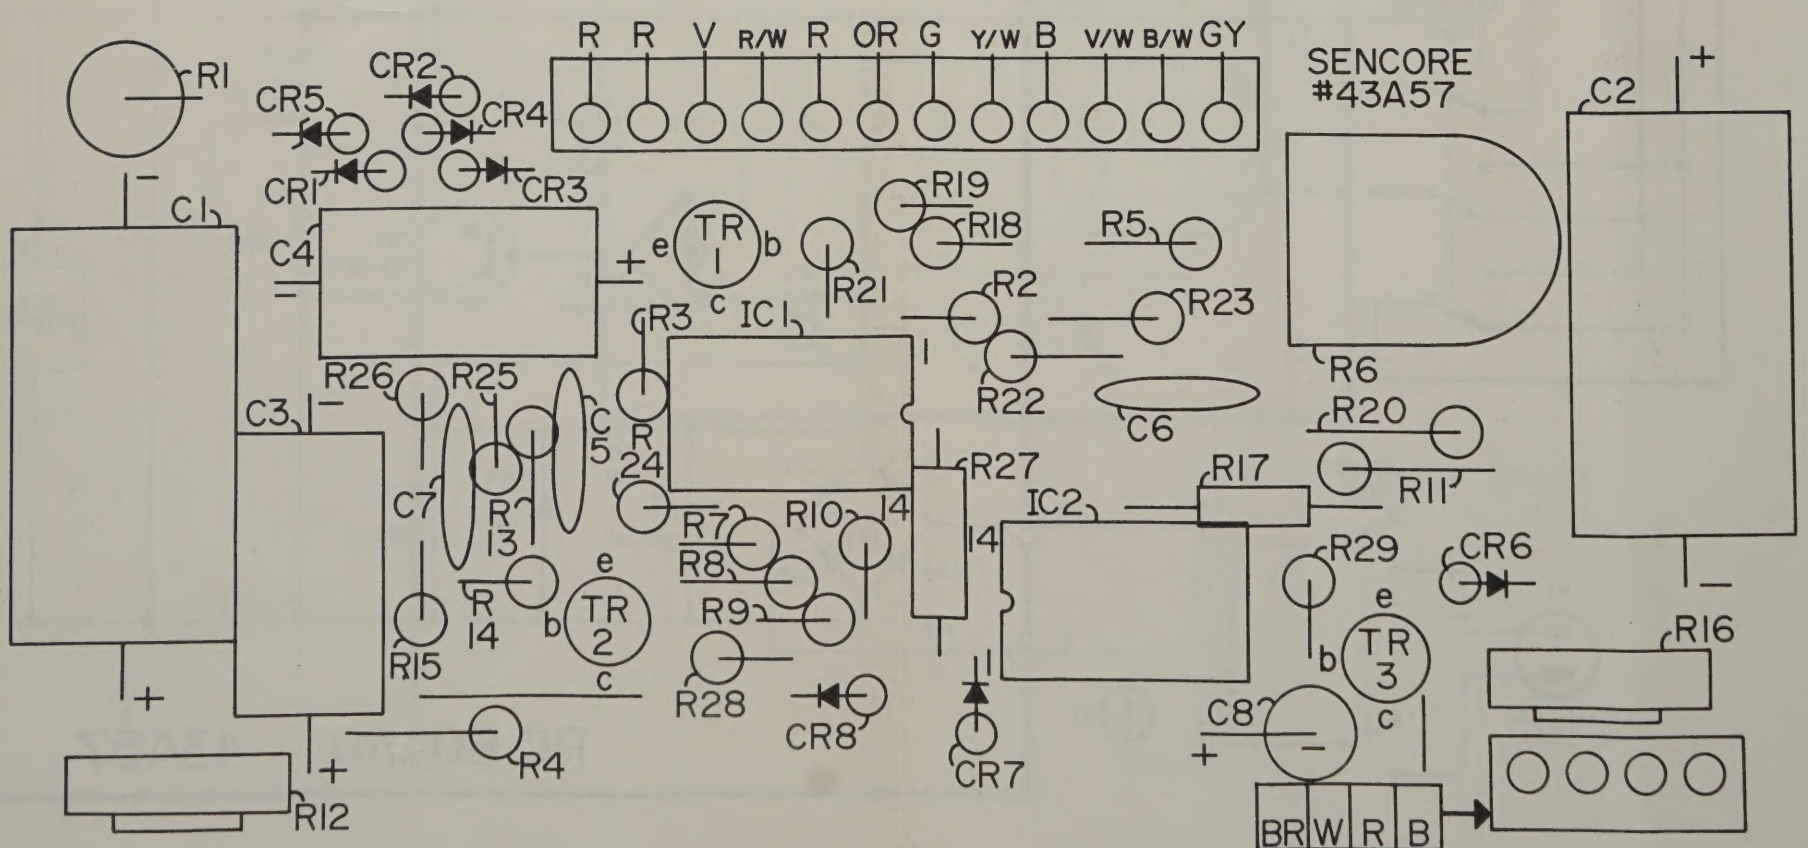


Main PC Board - Component Side View


BOARD LEGENDS

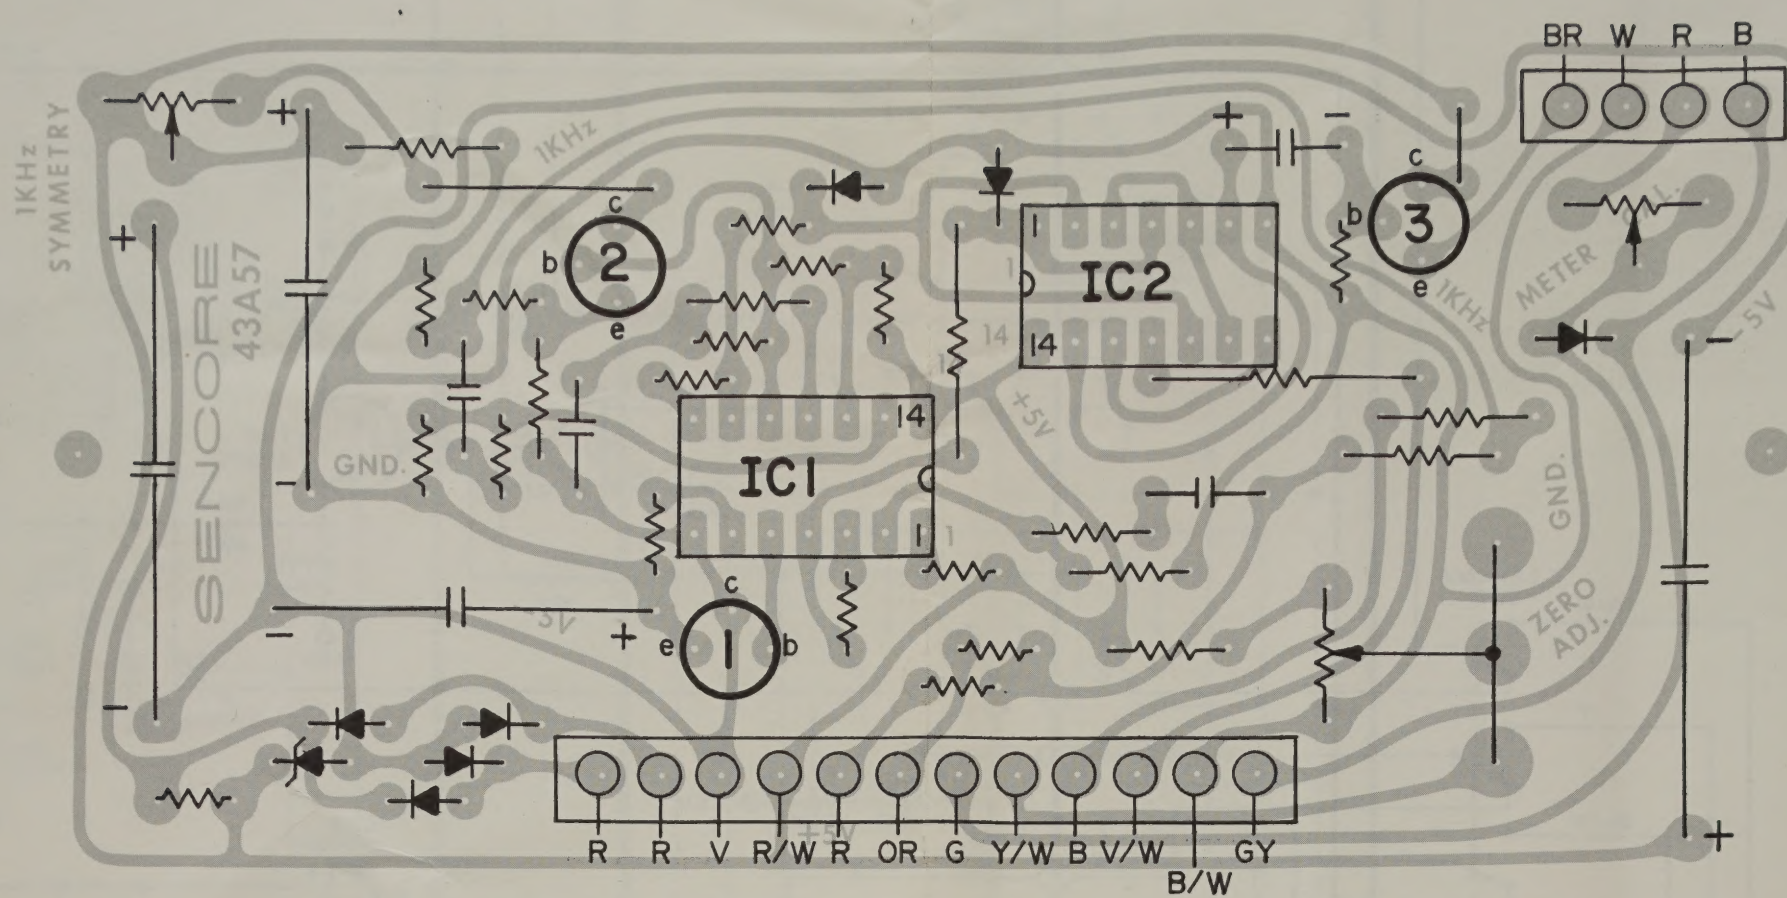

Main PC Board - Foil Side View

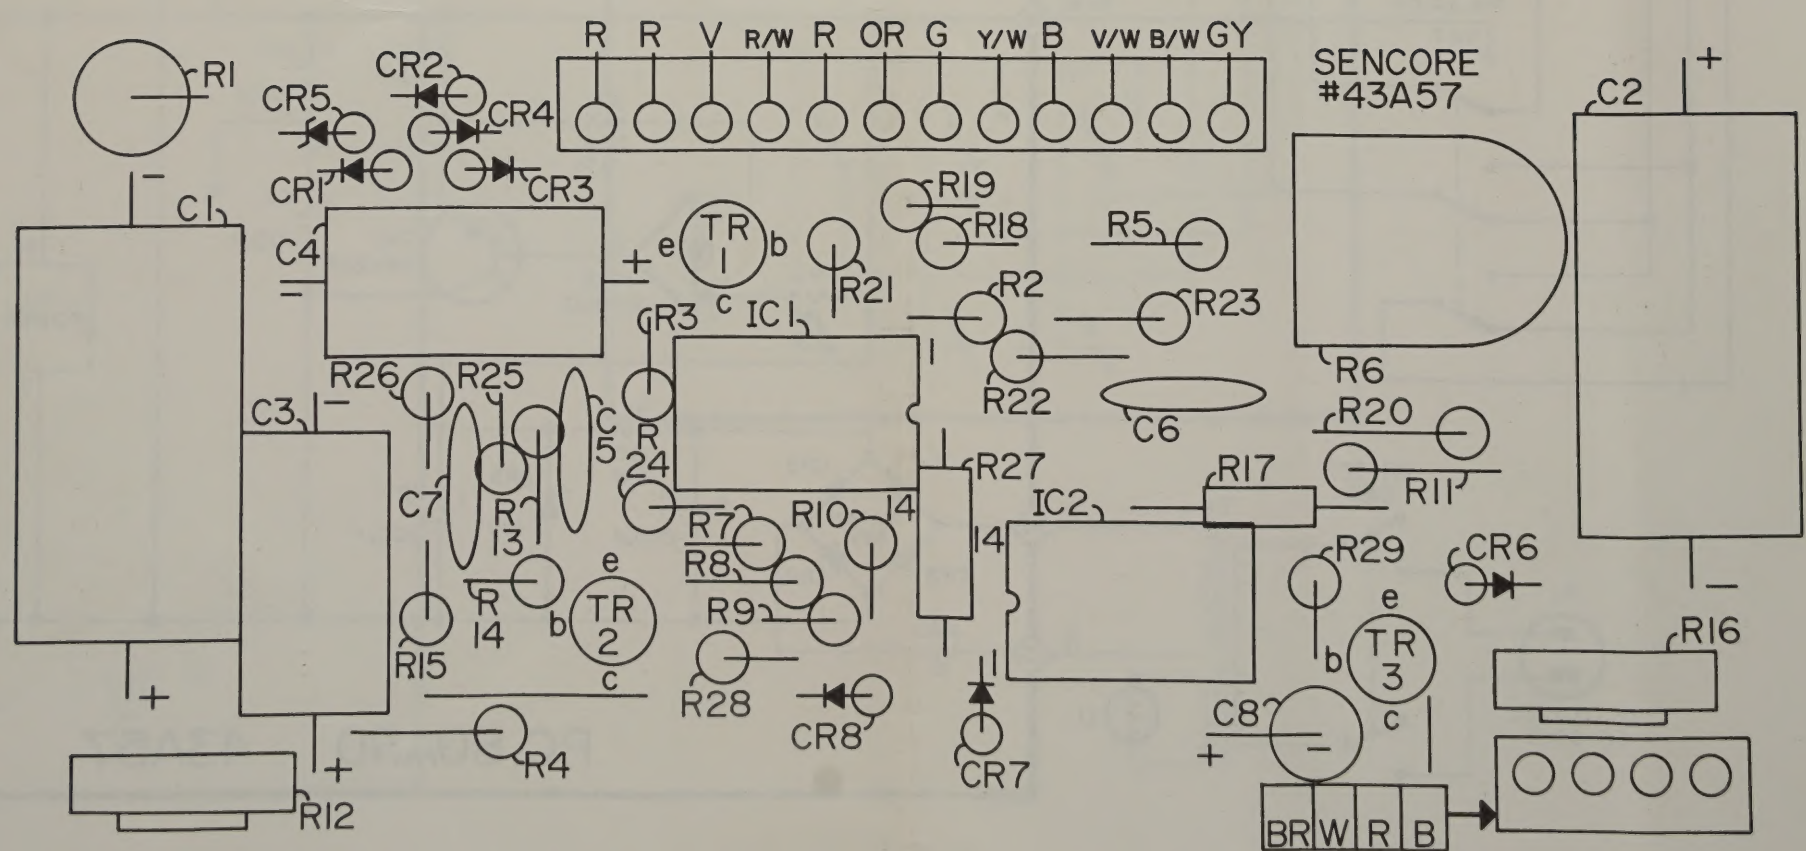

Main PC Board - Component Side View

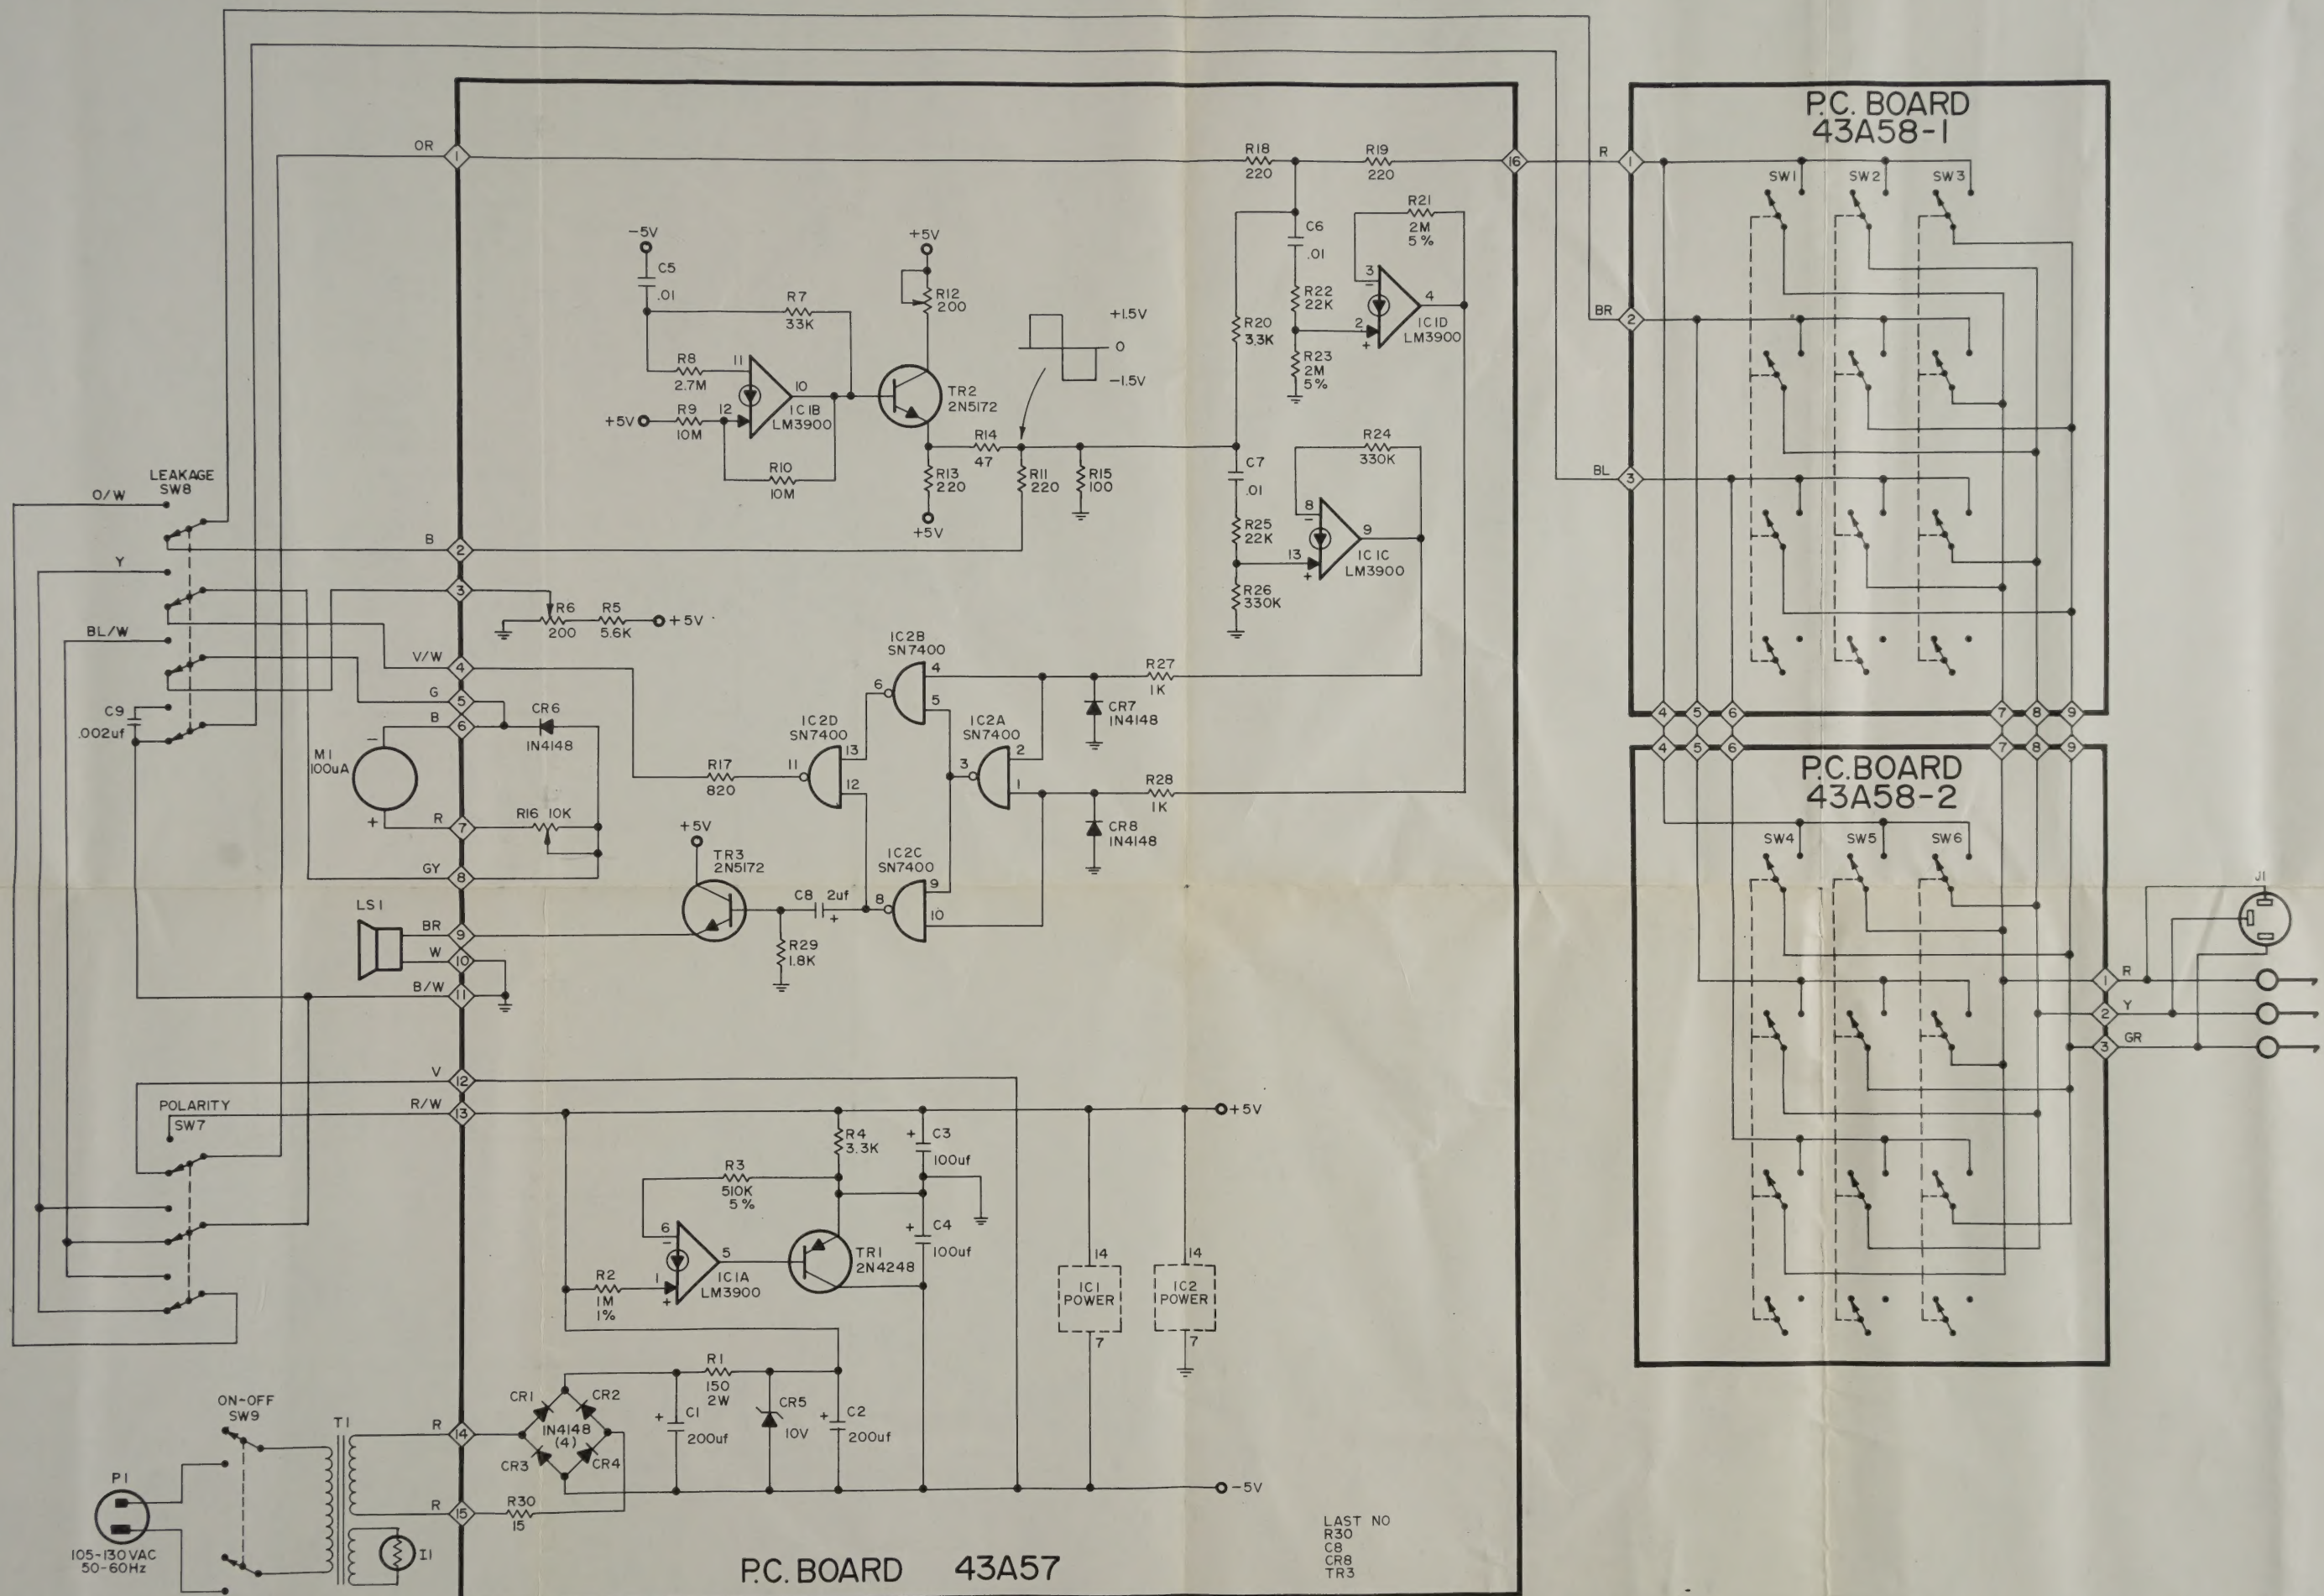

TF26 PARTS LIST

SCHEMATIC REF. NO.	PART NO.	DESCRIPTION	PRICE
CR1,2,3,4 6,7,8, CR5	50C5-2	Diode, 1N4148	.25
	50C4-12	Diode, Zener, 10V, 5% 1W	.50
IC1	69G9	I.C. LM3900, Quad Op Amp	2.50
IC2	69G10	I.C. SN7400, Quad AND I.C.	1.25
J1	26G185	Socket	1.25
LS1	48G2	Speaker, 2"	7.25
M1	23C49-A	Meter, 100uA, 1900 Ohms	20.00
SW1-6	25A186	Switch, Pushbutton 4P2P	3.25
SW7	25G187	Switch, Slide 3P2P	1.00
SW8	25G185	Switch, Slide 4P2P	1.25
SW9	25G3	Switch, Slide 2P2P	.50
T1	28B56	Transformer	3.50
TR1	19A14-1	Transistor, 2N4248	.50
TR2,3	19A4-1	Transistor, 2N5172	.50
	110C293	Case Wrap Riveted Assy.	5.50
	110B294	Meter Door Riveted Assy.	1.50
	110A295	Lead Storage Door Rivet Assy.	1.50
	108B84	Front Panel Riveted Assy.	10.00
	8B84-C	Front Panel	2.50
	139G70	Test Lead Assembly.	7.50
	68G12R	Probe EZ Hook, Red w/Gray Lead	2.25
	68G12Y	Probe EZ Hook, Yellow w/Gray Lead	2.25
	68G12G	Probe EZ Hook, Green w/Gray Lead	2.25

143A57	Main P.C. Board Assy.	27.25
143A58-1	Pushbutton P.C. Board Assy. (Top)	7.75
143A58-2	Pushbutton P.C. Board Assy. (Bottom)	7.75
110B296	Case Bottom Assembly	4.50
21A44	Glamour Cap, Slide Switch	.25
21A58	Pushbutton	.25

Prices in effect at date of printing and are subject to change without notice.

When ordering parts, please specify model number, part number and description. Service and parts invoices are C.O.D. Please include remittance (check or money order) with your order to save C.O.D. charges. Minimum billing \$3.00.